Ride Connected

Blast your favorite tunes, talk over the intercom with your buddies, hear directions from your GPS and more, all through your headset. With built-in Bluetooth® capabilities, Audio Multitasking™, HD speakers and a microphone using Advanced Noise Control™, technology has never felt so minimal or freeing.

BLUETOOTH 4.1

INTERCOM 1.6 KM (1 MILE)*

EIGHT-WAY INTERCOM

CUSTOM HELMET FIT

AUDIO MULTITASKING

ADVANCED NOISE CONTROL

VOICE COMMAND

MUSIC SHARING

*: in open terrain

Getting Started

1. This product comes with a Quick Start Guide, which is a basic version of the User's Guide. **A FULL VERSION OF THE USER'S GUIDE CAN BE DOWNLOADED AT WWW.SMARTHJC.COM/BT.**

2. Update this product for free with the latest firmware to fully enjoy the new advanced features built into this product. Visit **www.smarthjc.com/bt** to see how to update your product.

HJC Corporation
hjchelmets.com
Customer Support: www.smarthjc.com/bt

DC Power Charging & Firmware Upgrade Port

Wired Microphone for Full Face Helmets

Wired Boom Microphone for Modular/Open Face Helmets

Bluetooth Module

Status LED

Speaker

Button Module

Status LED

(–) Button

Center Button

(+) Button

**SMART HJC 20B** compatible HJC helmets can be found by scanning the QR code of the product box.

1.0.1

Modular/Open Face Helmet Installation
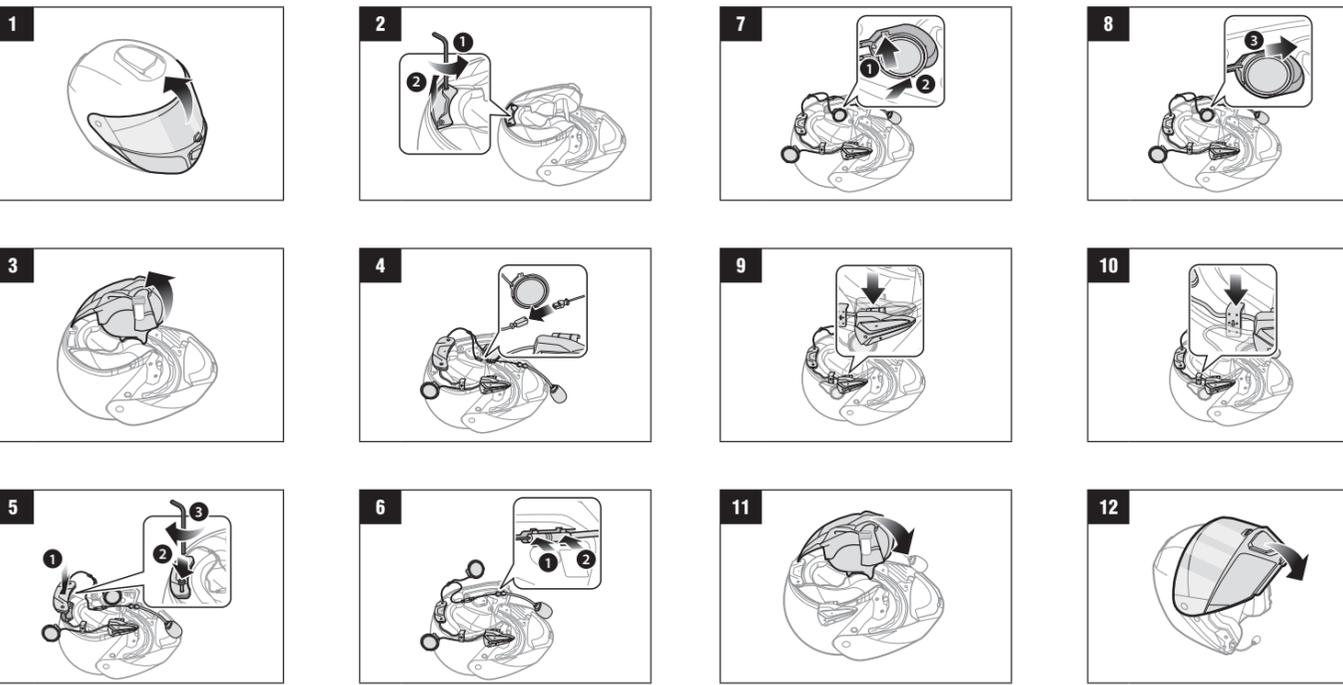
Full Face Helmet Installation

Button Operation

Center Button	Tap	Tapping
Center Button	1"	Press for 1 sec
	Tap	Double Tapping
	6" 12"	Press and Hold

Power On/Off

Powering On

(+) Button + Center Button → 1" Press

Powering Off

(+) Button + Center Button → Tap

Volume Adjustment

Volume Up

(+) Button → Tap

**Volume Down**

(–) Button → Tap
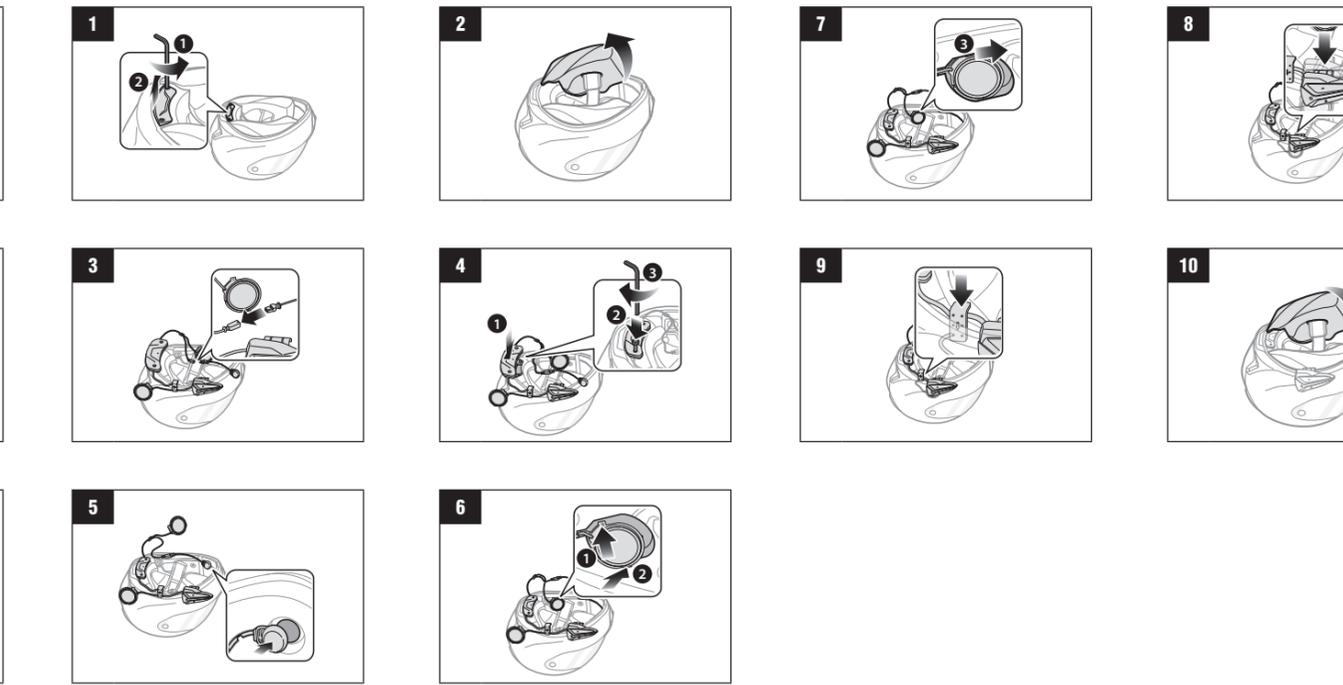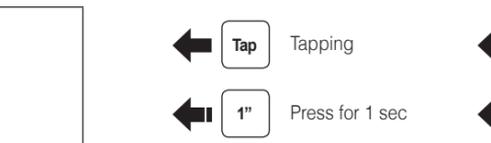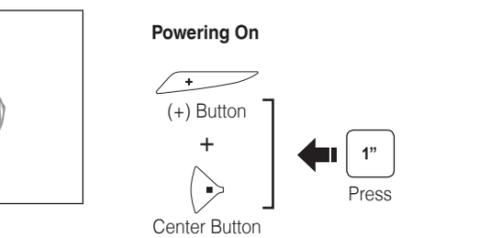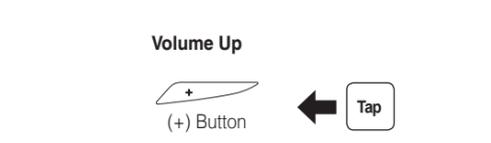
Bluetooth Pairing | Phone, MP3 and GPS

Center Button → 12" (+) Button → Tap

PIN: Press → (+) Button Tap

Select **SMART HJC 20B** in your mobile phone

Device A
Device B

Status LED 🔴🔵🔴

Enter 0 0 0 0 PIN

Mobile Phone

Answer	Center Button	Tap
End / Reject	Center Button	2" Press
Voice Dial	Center Button	3" Press
Speed Dial	(+) Button	3" Press

Music

Play / Pause music — ▶ / ❙❙ — Center Button — 1" Press

Track forward — ▶▶ — (+) Button — 1" Press

Track backward — ◀◀ — (-) Button — 1" Press

Battery Check

Power On

Status LED

70 ~ 100%
30 ~ 70%
0 ~ 30%

Configuration Menu

Configuration Menu — Center Button — 12" Press

Using the SMART HJC Device Manager

You can upgrade the headset's firmware and configure its settings directly from your PC or Apple computer.
Download the **SMART HJC** Device Manager, please visit **www.smarthjc.com/bt**.

Using the SMART HJC BT Smartphone App

You can configure its settings directly from your smartphone.
Download the **SMART HJC BT** App from Google Play (Android) or App Store (iOS).

Intercom Pairing

Pairing

Headset A — Headset B

Center Button — Press — 8"
Status LED

Center Button — Press — 8"
Status LED

Center Button — Tap

Start / End Intercom

Center Button — Tap
1st Friend

Center Button — Tap
2nd Friend

Center Button — Tap
3rd ~ 9th Friend, Cancel

(+) Button or (-) Button — Tap
3rd Friend and above

Confrm — Center Button — Tap

Radio On / Off

(-) Button — 1" Press

Radio Seek Station

Seek Up — (+) Button — Tap

Seek Down — (-) Button — Tap
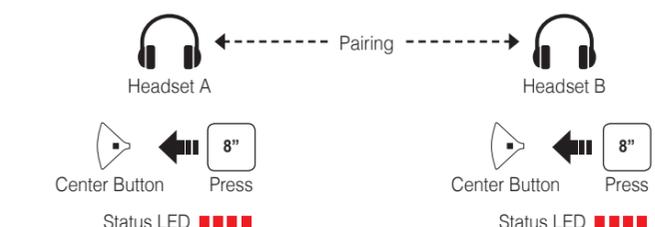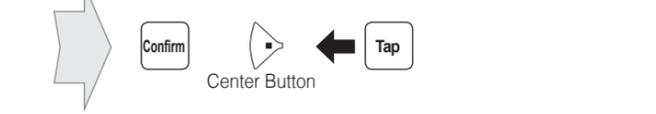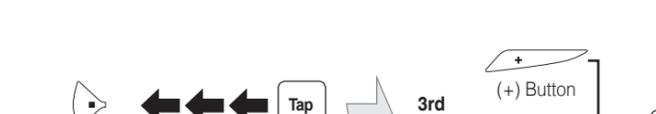
Save Preset While Seeking

Center Button — 3" Press

(+) Button or (-) Button — Tap

1 ~ 10, Cancel

(+) Button or (-) Button — Tap

Save — (+) Button — 1" Press

Delete — (-) Button — 1" Press

Radio Scan Up FM Band

Start or Stop — (+) Button — 1" Press

Save Preset While Scanning

Save — Center Button — Tap
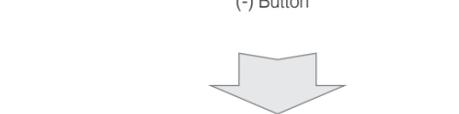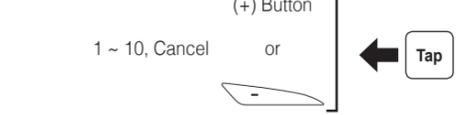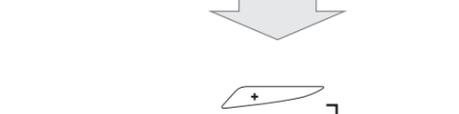
Radio Move to Preset Station

Preset [# + 1] — Center Button — 1" Press

Voice Command

"Hello Sena" — or — Center Button + (-) Button — Tap
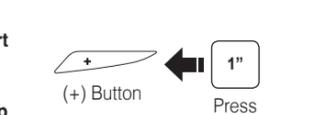
Voice Command	Function
"Music"	Play/Pause music
"FM radio"	FM Radio on/off
"Intercom [one, two, ... , nine]"	Start/End each intercom
"Voice dial"	Press the Center Button for 3 seconds
"Speed dial [one, two, three]"	Speed dialing

Troubleshooting

Factory Reset

If you want to restore the headset to factory default settings, use the Factory Reset in the configuration menu. The headset automatically restores the default settings and turns off.

Fault Reset

If the headset is not working properly for any reason, reset the headset by gently inserting a paperclip into the pinhole located next to the screw and lightly pressing the Fault Reset Button.

Fault Reset Button

Battery Charging

Please make sure to take off your headset while charging.
The headset automatically turns off during charging.

Quick Reference

Type	Operation	Button Command
Basic Operations	Power on	Press the (+) Button and the Center Button for 1 second
	Power off	Tap the (+) Button and the Center Button
	Volume adjustment	Tap the (+) Button or the (-) Button
	Voice Command	Say "Hello Sena"
		Tap the Center Button and the (-) Button
Mobile Phone	Answer phone call	Press the Center Button
	End/Reject phone call	Press the Center Button for 2 seconds
	Voice dial	Press the Center Button for 3 seconds
	Speed dial	Press the (+) Button for 3 seconds
Music	Play/Pause music	Press the Center Button for 1 second
	Track forward	Press the (+) Button for 1 second
	Track backward	Press the (-) Button for 1 second

Quick Reference

Type	Operation	Button Command
FM Radio	FM radio on/off	Press the (-) Button for 1 second
	Seek forward	Double tap the (+) Button
	Seek backward	Double tap the (-) Button
Intercom	Intercom pairing	Press the Center Button for 8 seconds
	Intercom pairing	Tap the Center Button
	Start/End intercom	Tap the Center Button

1.0.1_EN_200316